
 **可转位钢轨钻 (SKSY)**  
 Switchable rail cutter(SKSY)



d:直径  
 d: Diameter  
 L: 钻孔的深度  
 L: Cutting depth

» 安装示意图:  
 Installation schematic diagram:

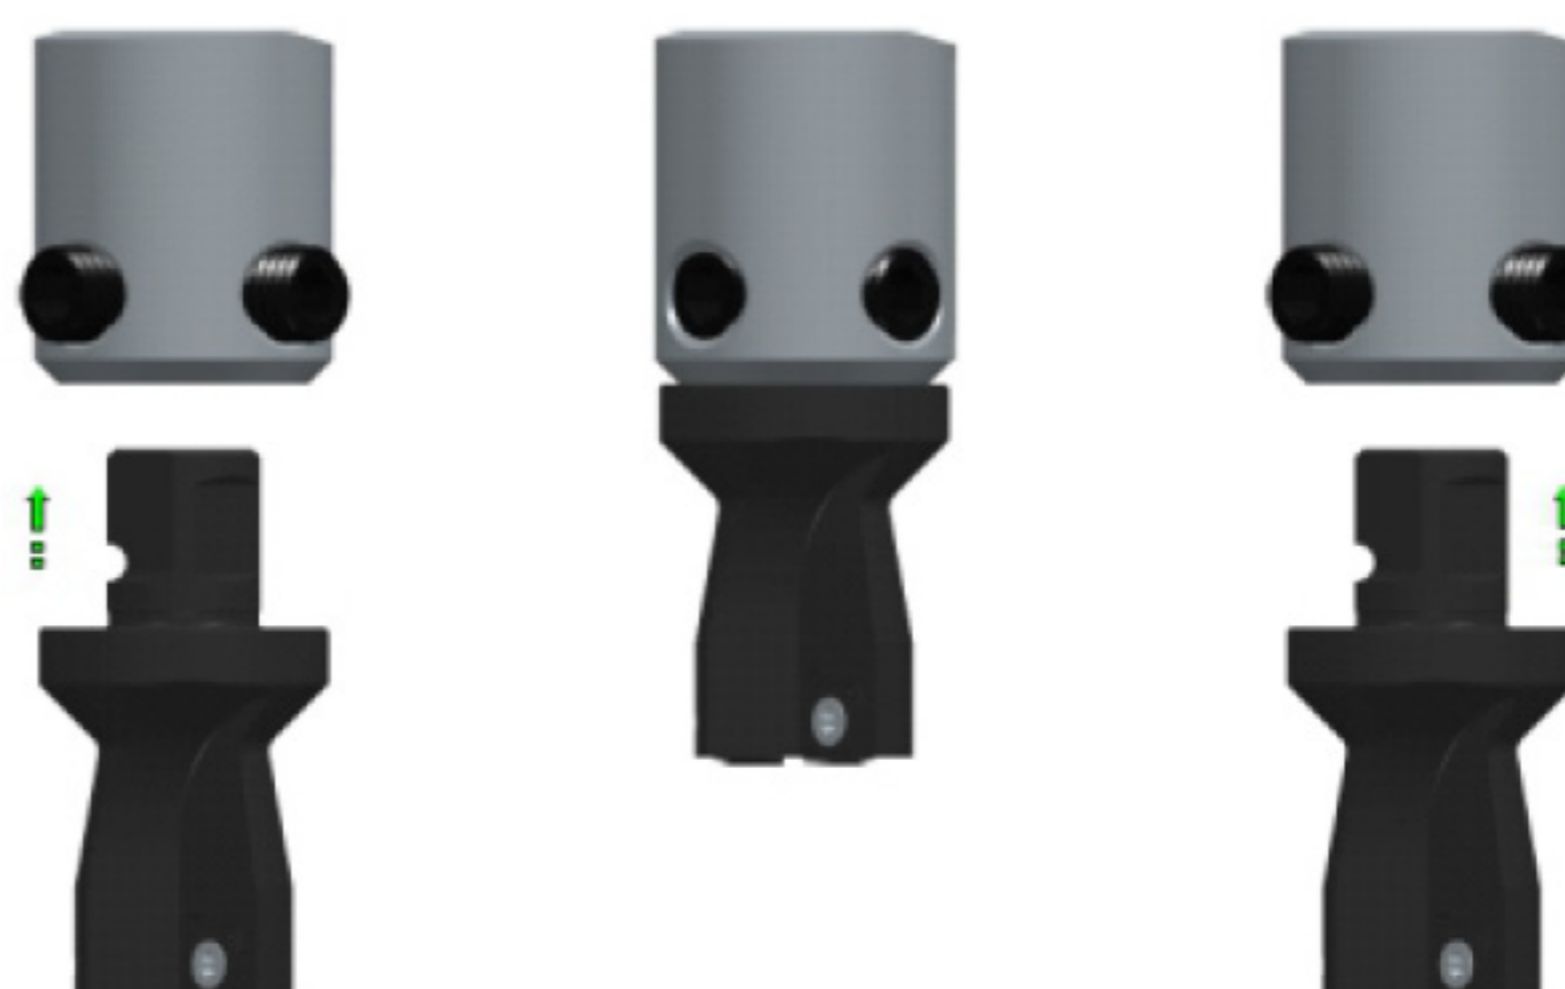

» 型号规格:  
 Model and specification:

型号 Model	SKSY-2
直径d(mm) Diameter d(mm)	Φ17-36
钻孔的深度L(mm) Cutting depth L(mm)	25

» 附件:  
 Annexes:

订货号 Order number	名称 Name	图片 Picture	规格 Specification	配刀直径(mm) Diameter of accessory blade(mm)
2501014	刀片 Blade		6*6*2.4	Φ18-21
2501015			8*8*4	Φ22-27
2501013			10*10*4.3	Φ28-34
2501016			11.5*11.5*4.8	Φ35-36
2102027	螺钉 Screw		M2.2	Φ18-21
2102028			M2.5	Φ22-27
2102022			M3.5	Φ28-34
2102029			M4	Φ35-36
2502012	扳手 Wrench		T6	Φ18-21
2502011			T7	Φ22-27
2502010			T15	Φ28-36

» 特色、亮点:  
 Features and highlights:

- 刀片和刀柄分离，刀柄重复使用，每个刀片有4个刀刃，经济性好；
- 采用U钻的结构形式，中心出水，切削性能好；
- 适合高刚性设备使用，寿命更长；
- The blade and shank are separated, and the shank could be utilized repeatedly, each blade has 4 edges, possessing good economic efficiency;
- Employ structural form of U-drill, water comes out from center, possessing good cutting performance;
- Suitable for high rigidity equipment utilization, with longer life.

» 可选购产品说明:  
 Optional purchased products:

